


TUNING FORK RESONATORS
音叉式諧振器



FEATURES




- Small Sizes
- High Performance / Cost Ratio
- Wide Frequency Range

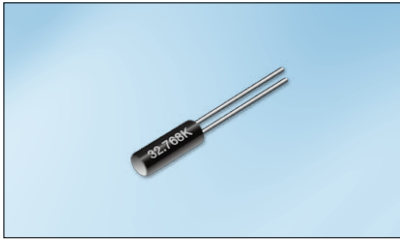

Parameters		Specifications		
Product Series 產品系列		K155	K206	K308
Nominal Frequency 標稱頻率	f_0	Standard : 32.768KHz Optional : 30KHz ~ 200KHz		
Frequency Tolerance, Ta=25°C ± 3°C 常溫頻率偏差	$\Delta f/f$	±20ppm		
Load Capacitance 負載電容	C_L	12.5pF or customer specify		
Temperature Coefficient 溫度系數	$\Delta f/f$	-0.034±0.006ppm/°C ²		
Operating Temperature Range 工作溫度範圍	T _{OPR}	-20°C ~ +70°C		
Storage Temperature Range 儲存溫度範圍	T _{STG}	-55°C ~ +125°C		
Drive Level 激勵功率	DL	1μW Max.		
Series Resistance (ESR) 串聯諧振阻抗	R ₁	65KΩ Max.		50KΩ Max.
Insulation Resistance 絕緣阻抗	IR	500MΩ Min.		
Aging 老化率	Δf_A	±5ppm/Year Max.		

Please consult our sales representatives for other specifications.
如對其他規格查詢，請與我司銷售人員聯繫

DIMENSION (mm)

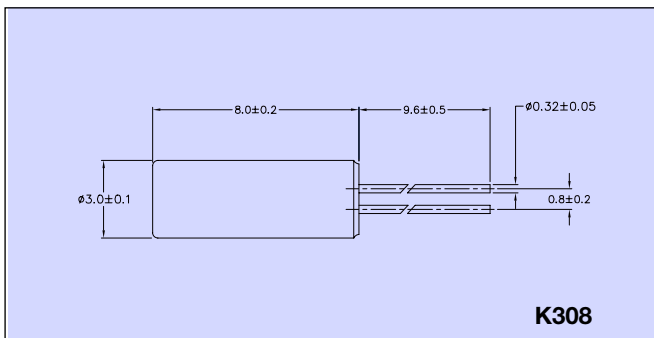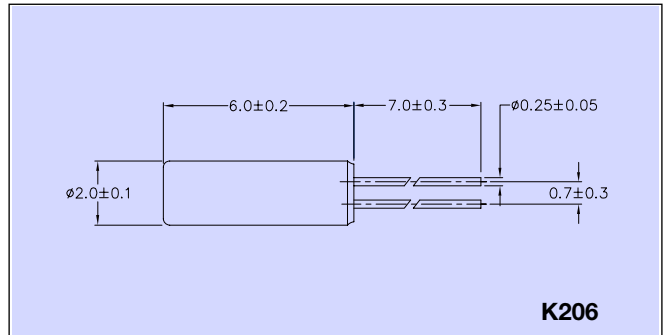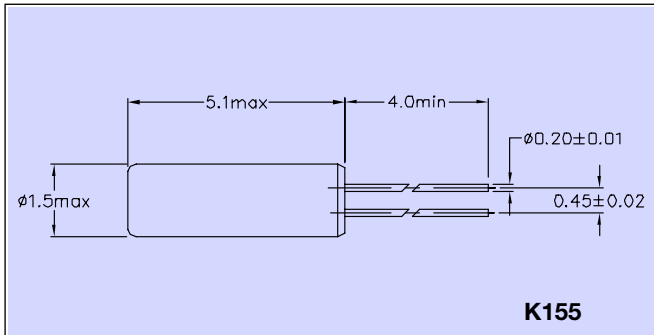

All specifications are subject to change without prior notice.
本公司保留修改規格的權利。



Shenzhen XINSHOUXUAN Electronic CO.,LTD
深圳市新首選電子有限公司

add: The 5/F 18 Building Hongfa Industry Garder Jingtang Rod. Tangtou village Shiyan Street Bao-an District Shenzhen City. China
Tel: +86-755-2982 6177 Fax: +86-755-2982 6178 Email:info@jhxcorp.com Web:http://www.xsxe.com 中文域名: 新首選·中國